ZR-FD High Efficiency Series

ZR14™ 1' x 4' High Efficiency Series LED Troffer with Matte Finish

Product Description

 $\label{thm:commercial} \mbox{The ZR-FD High Efficiency Series is a commercial spec-grade LED troffer delivering superior energy}$ efficiency of up to 130 lumens per watt for maximum energy savings. But stellar lumen-per-watt performance is just the beginning: the ZR-FD High Efficiency Series also provides a matte finished housing for less glare and better light distribution, standard 0 to 10V dimming to 5% and 80+ CRI — all in a package with a price as attractive as it looks.

Performance Summary

Efficacy: 130 LPW

Initial Delivered Lumens: 4,000 lumens

Input Power: 30 watts

CRI: 80+ CRI

CCT: 3500K, 4000K

Input Voltage: 120-277 VAC

Limited Warranty*: 10 years on luminaire

Limited Warranty Emergency Back Up (EB) Battery: 1 Year on Battery Back Up. Test regularly in

accordance with local codes

Controls: 0-10V dimming to 5%


Mounting: Recessed*


† See www.cree.com/canada for warranty terms
* Not intended for use with 9/16" T-Bar grids unless used with a 9/16" accessory clip like "Armstrong® LFC- Fixture Clip" which can be purchased through distribution. Consult factory for non-standard grid applications.

Accessories

Field-Installed **Drywall Grid Adapter** Wireless 0-10V Dimming/Switching Interface with Cree Smartcast® Technology <u>CIF-10V-CWC-SNSR</u>
- For use with luminaires with 10V controls when integral SmartCast isn't available DGA14-WH1 Surface Mount Kit Cree SmartCast® Technology Configuration Tool Not for use with EB14 or SmartCast[®] Technology <u>CCT-CWC-1</u>One required per project when CIF-10V is selected 6' Flexible Power Whip Chicago Plenum Field Kit PW-18/4-06-9T-SS CPLZR - Fits all ZR types to be installed in the field





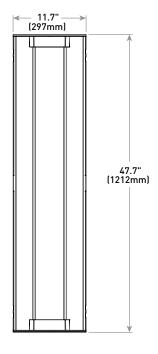

Ordering Information

Example: ZR14M-40L-35K-10V-FD

ZR14M	40L			10V	FD	
Product	Initial Delivered Lumens	сст	Voltage	Control	CRI	Options
ZR14M	40L 30W, 4,000 lumens	35K 3500K 40K 4000K	Blank 120-277 Volt	10V 0-10V dimming to 5%	FD 80+ CRI	EB14 Emergency Backup - 1,400 lumens - Provides 90 minutes of emergency operation







Rev. Date: V6 02/16/2017

Product Specifications

CONSTRUCTION & MATERIALS

- Durable 22 ga.cold rolled steel housing provides strength and uniformity
- Ultra-thin 3.9" (99mm) luminaire height and lightweight design effectively target a broad range of plenum spaces and allow for easy installations
- · Luminaire is pre-painted for enhanced smooth matte finish
- Includes t-bar clips and holes for mounting support wires (by others)
- Luminaire sides and ends are hemmed in for safe, easy handling
- · Includes lens gasket to prevent ingress of insects
- Not for installation within 3" (76mm) of insulation

OPTICAL SYSTEM

- Unique luminaire design creates perfect balance of both horizontal and vertical illumination
- Optimized smooth acrylic lens eliminates pixelation and delivers a low-glare, diffused light distribution

ELECTRICAL SYSTEM

 Cree born components including highly efficacious Cree® LED chips along with an integral high-efficiency Cree® driver

Power Factor: = 0.9 nominal
Input Power: Stays constant over life
Input Voltage: 120-277V, 60Hz

• Operating Temperature Range: 0°C - + 35°C (32°F - + 95°F)

• Total Harmonic Distortion: <20%

CONTROLS

- Continuous dimming to 5% with 0-10V DC control protocol
- 10V Source Current: 0.25mA
- For use with Class 2 dimming systems only. Use only lighting controls with relay or FET-based outputs, or lighting controls with neutral connection
- Reference www.creelink.com/exLink.asp?70982140Z58R34l26620963 for recommended dimming controls and wiring diagrams

REGULATORY & VOLUNTARY QUALIFICATIONS

- cULus Listed
- Suitable for damp locations
- Designed for indoor use
- UL924 (EB option). Maximum mounting height: 15.0' (4.6m)
- RoHS compliant. Consult factory for additional details
- Meets FCC Part 15, Subpart B, Class A standards for conducted and radiated emissions
- DLC Premium qualified. Please refer to www.designlights.org/QPL for most current information

Electrical Data*							
Initial	nitial System		Total Current (A)				
Delivered Lumens	Watts 120-277V	120V	208V	240V	277V		
40L	30	0.25	0.16	0.14	0.12		
40L w/EB14 Option	33	0.28	0.18	0.15	0.13		

^{*} Electrical data at 25 $^{\circ}$ C (77 $^{\circ}$ F). Actual wattage may differ by +/- 10% when operating between 120-277V +/- 10%

Recommend	Recommended ZR Series Lumen Maintenance Factors (LMF)¹						
Ambient	Initial LMF	25K hr Projected ² LMF	50K hr Projected ² LMF	75K hr Calculated³ LMF	100K hr Calculated³ LMF		
0°C (32°F)	1.04	1.04	1.04	1.04	1.04		
5°C (41°F)	1.03	1.03	1.03	1.03	1.03		
10°C (50°F)	1.02	1.02	1.02	1.02	1.02		
15°C (59°F)	1.02	1.02	1.02	1.02	1.02		
20°C (68°F)	1.01	1.01	1.01	1.01	1.01		
25°C (77°F)	1.00	1.00	1.00	1.00	1.00		
30°C (86°F)	0.99	0.99	0.99	0.99	0.99		
35°C (95°F)	0.98	0.98	0.98	0.98	0.98		

Lumen maintenance values at 25°C are calculated per TM-21 based on LM-80 data and in-situ luminaire testing 2 in accordance with IESNA TM-21-11, Projected Values represent interpolated value based on time durations that are within six times [6X] the IESNA LM-80-08 total test duration (in hours) for the device under testing ([DUT] i.e. the packaged LED chip]

Application Reference

Open Space							
Spacing	Lumens	Wattage	LPW	w/ft²	Average fc		
8 x 8		30	133	0.45	56		
8 x 10	, , , , ,			0.38	46		
10 x 10	4,000			0.30	37		
10 x 12				0.24	30		

10' ceiling: 80/50/20 reflectances; 2.5' workplane, open room. LLF: 1.0 Initial Open Space: 50' x 40' x 10' and 10' ceiling: 80/50/20 reflectances; 2.5' workplane, open room. LLF: 1.0 Initial Open Space: 50' x 40' x 10' and 10' are specified by the space of the sp




In accordance with IESNA TM-21-11, Calculated Values represent time durations that exceed six times (6X) the IESNA LM-80-08 total test duration (in hours) for the device under testing ([DUT) i.e. the packaged LED chip)

Photometry

ZR14M-40L-35K-10V-FD BASED ON CREE REPORT TEST #: PL08598-001A

Luminaire photometry has been conducted by a NVLAP accredited testing laboratory in accordance with IESNA LM-79-08. IESNA LM-79-08 specifies the entire luminaire as the source resulting in a luminaire efficiency of 100%.



Coefficients Of Utilization – Zonal Cavity Method					
RC %:	80				
RW %:	70	50	30	10	
RCR: 0	119	119	119	119	
1	109	104	99	95	
2	99	90	83	77	
3	90	79	71	64	
4	82	70	61	54	
5	75	62	53	46	
6	69	56	47	40	
7	64	51	42	36	
8	60	46	38	32	
9	56	42	34	28	
10	52	39	31	26	

Effective Floor	Cavity Reflectance: 20%	
-----------------	-------------------------	--

Zonal Lumen Summary					
Zone	Zone Lumens % Lamp		Luminaire		
0-30	1057	N/A	26.6%		
0-40	1,736	N/A	43.6%		
0-60	3,100	N/A	77.9%		
0-90	3,977	N/A	100%		
0-180	3,977	N/A	100%		

Average Luminance Table (cd/m²)							
	ı	Horizontal	Angle				
		0°	45°	90°			
ngle	45°	9,339	10,114	10,518			
cal A	55°	8,838	9,962	10,587			
Vertical Angle	65°	8,147	9,819	10,178			
	75°	6,967	8,760	8,188			
	85°	5,119	5,811	4,553			

Reference http://creecanada.com/products/interior/troffers/zr-series/ for detailed photometric data

